

WORKING COPY

NOT TO BE REMOVED  
FROM THE DEPARTMENT

JJM 18 02 14/901

---

**XK SERIES  
HANDBOOKS  
SUPPLEMENT  
JJM 18 02 14/901**

---

## SUPPLEMENT INFORMATION

---

### **Convertible Top**

This supplement contains revised information regarding the cleaning of the convertible top, and the fitting of the convertible top cover. The following handbook pages are replaced by the information in this supplement.

Page 15 of the Vehicle Care Handbook, JJM 18 16 14/87.

Page 91 of the Driver's Handbook, JJM 18 02 14/90.

## CLEANING

### Glass Surfaces

To avoid scratching glass surfaces, **do not** clean dirty glass with dry paper or cloth. Use clean, warm water and a chamois leather which is reserved for glass only.

The following products will ensure glass surfaces and windscreen wiper blades are kept in good condition:

**Jaguar Screen Clean Paste** – Apply to the exterior of the windscreen **only** to ensure effective operation of the windscreen wiper blades.

**Jaguar Glass Cleaner** – Interior and exterior of all other surfaces.

**Jaguar Screen Wash** – Washer reservoir additive.

**Jaguar De-icer, ice scraper, anti-mist wipe cloth** – for use in adverse weather conditions.

#### Note:

1. **Renew the wiper blades when worn to prevent scratching. Clean regularly with a mild detergent solution.**
2. **The windscreen should be cleaned with Jaguar Screen Clean Paste at every service interval.**

### Under hood cleaning

Under hood cleaning using high pressure hoses or steam cleaners should be done by a Jaguar Dealer. The electronic control modules and fuse boxes could be damaged by indiscriminate use of cleaning equipment.

### Convertible Top Fabric

#### Caution:

1. **Automatic car wash brushes and detergents may damage the fabric.**
2. **Do not use spot cleaners, chemical dilutants or any organic cleaners. If in doubt, contact your Jaguar dealer.**

To maintain the appearance and condition of the convertible top, the recommendations given below should be followed. This is of particular importance in the case of light coloured tops.

Do not leave the top in the open (folded) position for longer than is necessary, as in certain circumstances permanent soiling along the folds may occur.

**Cleaning:** Every 1000 miles (1600 km) vacuum clean and wash the convertible top using the Jaguar Soft Top Cleaning Kit, carefully following the instructions enclosed.

**Reproofing:** Every 5000 miles (8000 km) reproof the top using the solution in the cleaning kit, carefully following the instructions enclosed.

## EXTERIOR FEATURES

### Convertible Top Cover

#### Caution:


1. When the convertible top is open, always fit the cover to prevent soiling and damage.
2. Take care to prevent the cover fixings damaging the bodywork when fitting the cover.

#### To fit the cover:

1. Open the luggage compartment.
2. Ensure that the convertible top is fully folded down.
3. Place the cover in position. Secure the front edge of the cover to the top of the trim panel with the two ring-pull fasteners. When fitting the fasteners, ensure that the hole in each fastener is positioned over its stud on the trim panel (A), then press firmly on the top of the fastener to secure (B).
4. Tuck the cover sides inside the body.
5. Tuck the front edge of the cover behind the rear seat (C).
6. Tuck the three straps into the gap at the luggage compartment lid hinge area. Close the lid, trapping the straps (D).

#### To remove the cover:

1. Open the luggage compartment.
2. Undo the two ring-pull fasteners by pulling upwards on the lifting ring of each fastener (E), then remove the cover.
3. Carefully roll the cover with the lining innermost and stow it in the bag provided.
4. Put the bag in the luggage compartment in a position where it will not be crushed. Avoid placing heavy objects on the cover as permanent damage may occur.

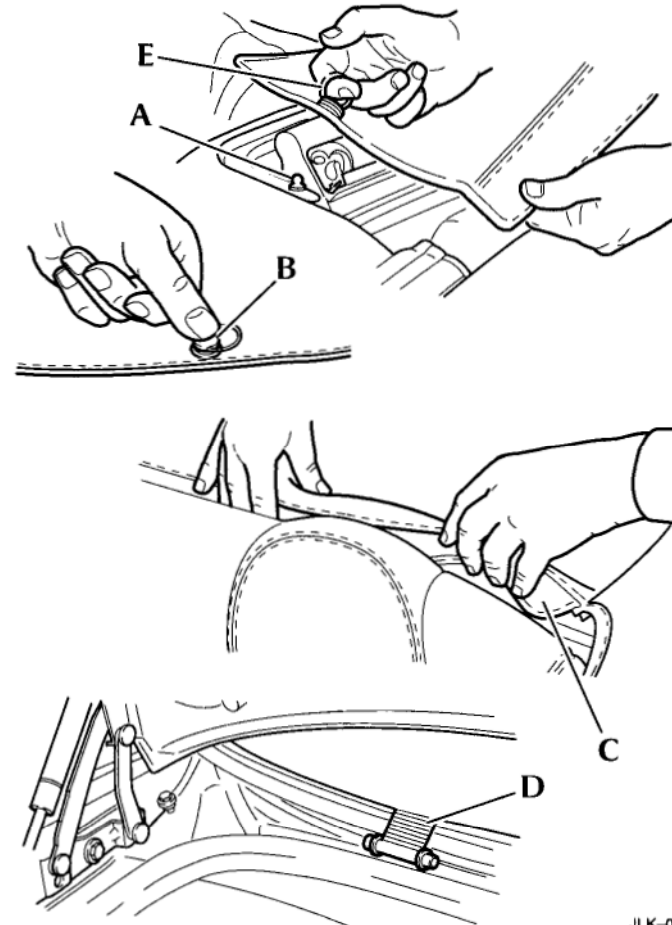

JLK-080